

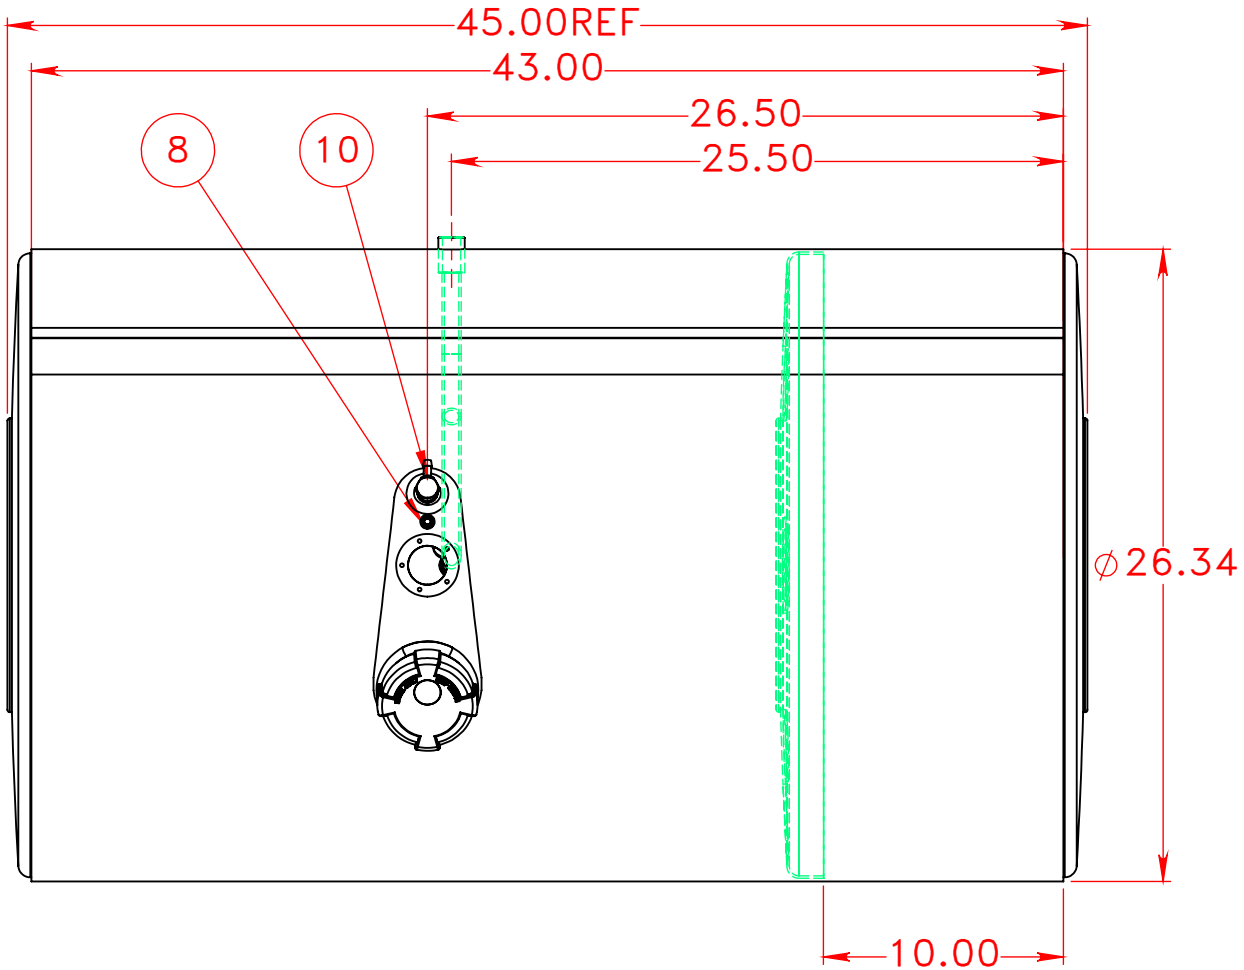
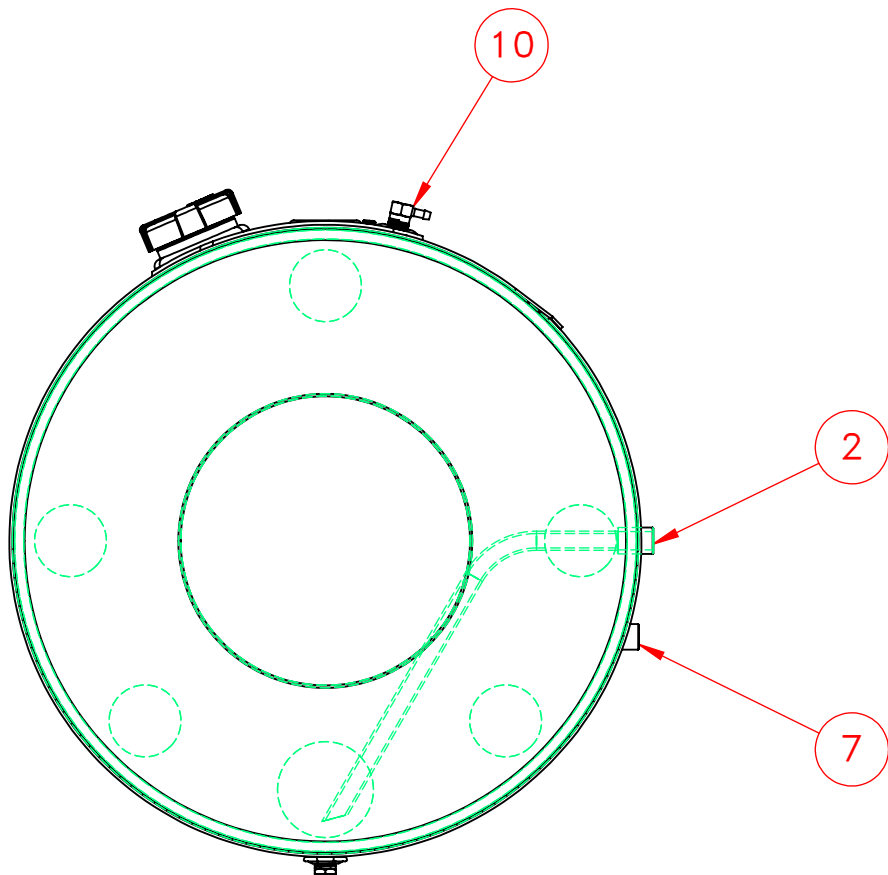


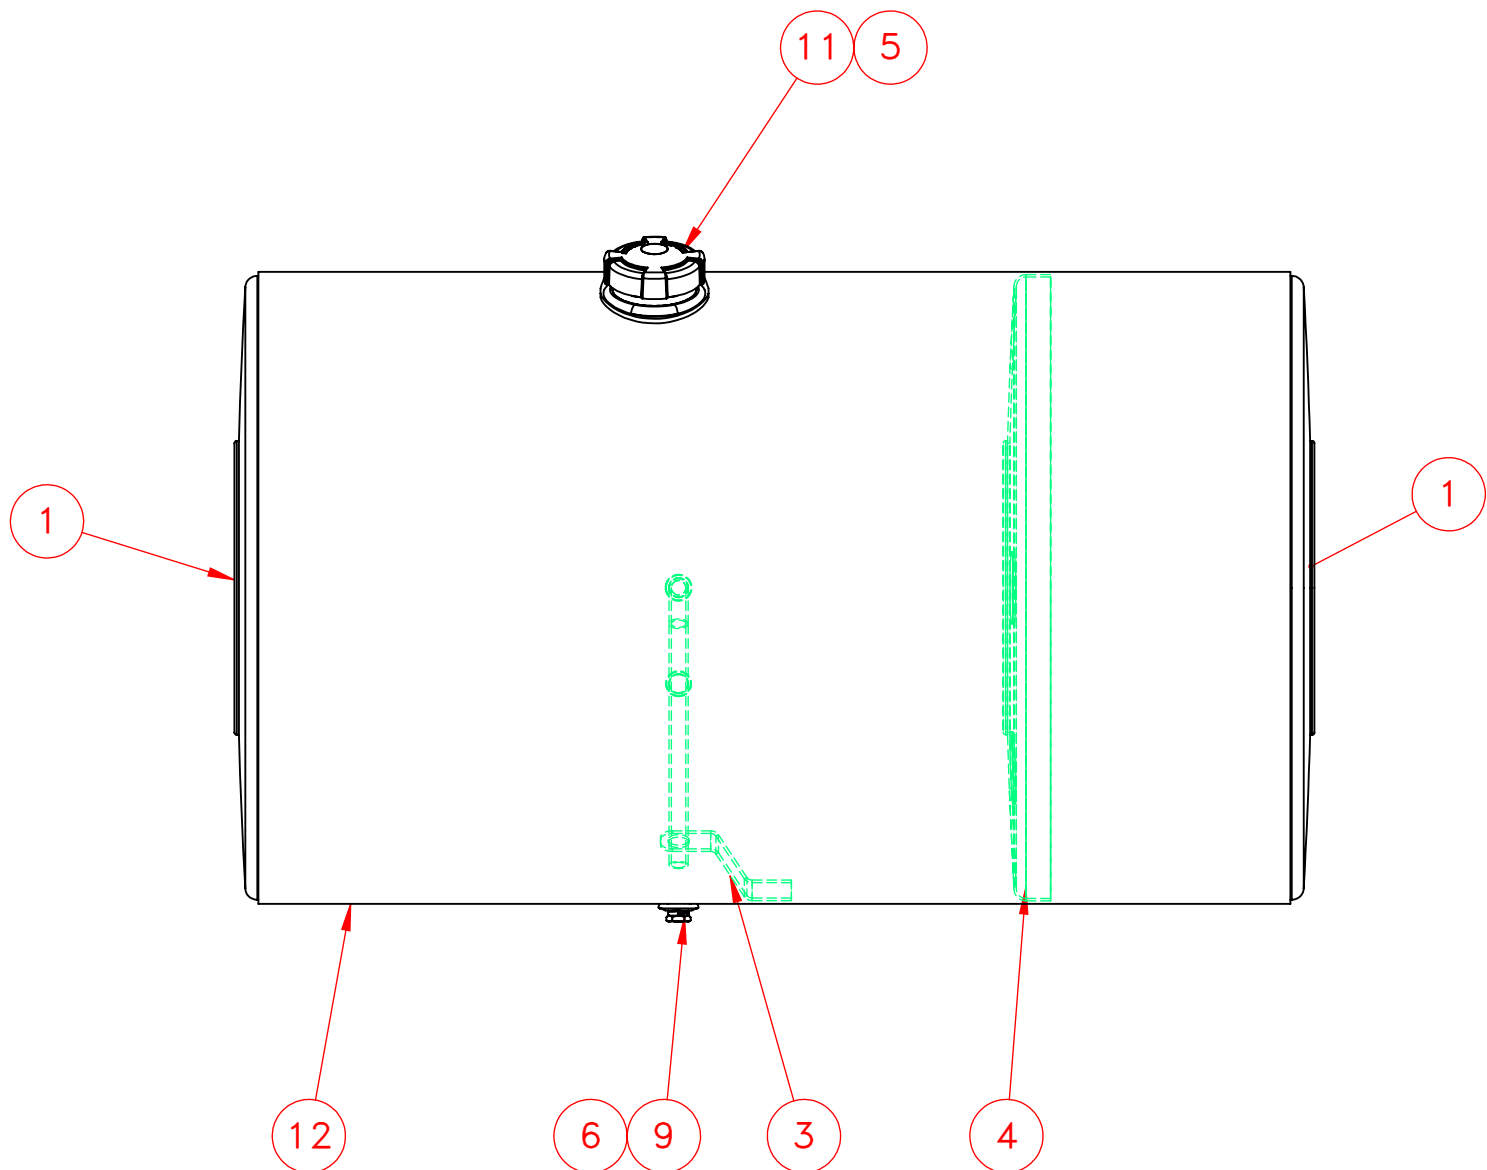

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...FULL BAFFLE(S) WHERE SHOWN
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

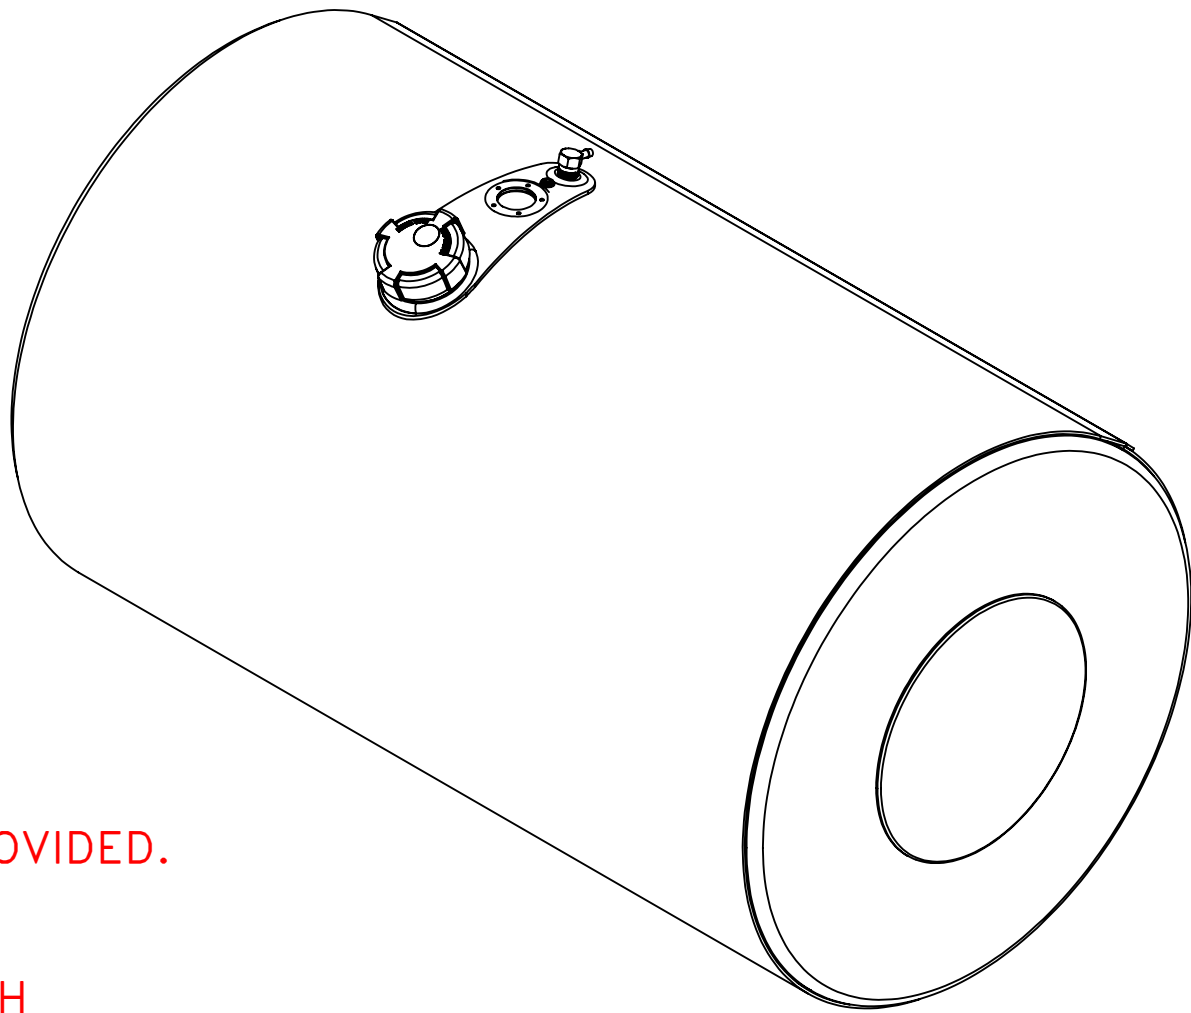

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	160-0056	26" Aluminum Head	2
2	490-0114	1/2" NPT Coupling With Draw Tube	1
3	490-3001	Down Tube Support	1
4	162-0056	26" Aluminum Baffle	1
5	260-0734	Aluminum 3" Filler/Float/Vent Plate	1
6	260-0005	1/2" FNPT Aluminum weld flange	1
7	312-0006	1/2" NPT Coupling	1
8	368-0005	1/4" NPT Brass Drain Plug Hex	1
9	458-0100	1/2" NPT Ball Check Drain Plug	1
10	454-0937	1/2" NPT Ball Check Vent	1
11	452-1628	Fuel Cap 3" Pressure Relief	1
12	116-1060	1/8" Auminum Wrap	1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROPOWER MFG. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPOWER MFG. INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME	DATE	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com TITLE: MK-26CFA45 100 US gal DIESEL FUEL TANK
	DIMENSIONS ARE IN INCHES	CHECKED	A.B	09/27/17	
	TOLERANCES: FRACTIONAL $\pm 1/16$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$ TWO PLACE DECIMAL $\pm .06$ THREE PLACE DECIMAL $\pm .031$	ENG APPR.			
	INTERPRET GEOMETRIC TOLERANCING PER:	MFG APPR.			
	MATERIAL	ALUMINUM	COMMENTS:		
	FINISH		THIRD ANGLE PROJECTION		
	DO NOT SCALE DRAWING				
					SIZE DWG. NO. REV C 22866
					SCALE: 1:8 WEIGHT: 67 LBS SHEET 1 OF 2